


## **NOTES**

- •Site Engineer to determine suitable fixing method.
- Fixing bolts by others 12 mm dia. holes (use M10 bolts).
   Size of concrete foundation and concrete mix to be determined on site. taking ground conditions into account.

  • All products are made to order. This bench can be customised to have
- bespoke lengths and widths.

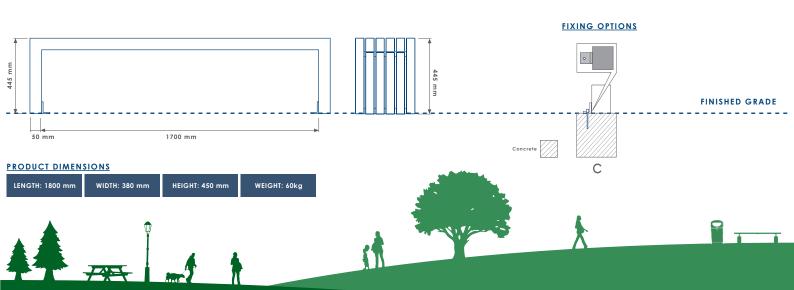

## PRODUCT FINISHES

FIXING OPTIONS: Surface Mount (C)

SLAT MATERIALS: Treated Redwood Class 3 (TRC3) - Treated Redwood Class 4 (TRC4) - Hardwood Iroko (HI)

METAL FINISHES: Galvanised (GL) - Galvanised and Powder Coated (GPC) - Stainless Steel (SS)